

LiveBOX™ Low-Profile 47" Outdoor LCD LXS-471LP



-2000 Nits Brightness

Direct sunlight viewable

-Low profile, wall mounting

6" total depth with wall mount

-No Blackening defect

Direct sunlight capable without blackout

-Wide operating temperature

All-weather -40 to +40c rated IP65 enclosure



BRING YOUR SIGNAGE TO LIFE !

Bring life to your promotions with the **LiveBOX™** digital display from LuxLCD.

Now you can apply digital signage to your building in a cost and space effective manner.

With a total depth of only 6 inches, you can install digital signage anywhere a static light box would fit.

LiveBOX™ is a true outdoor digital sign based on the latest LCD technology from LG Display®.

Check out these important features...

INTEGRAL USB MEDIA PLAYER, MULTIPLE INPUTS

In addition to HDMI and DVI-I/VGA inputs, LiveBOX™ also includes an integral USB media player that can loop images and videos from a local memory stick. Programmable thru the glass with included remote. Internal power source and space for other media players is also provided.

SITE-REPLACEABLE PROTECTIVE GLASS

LiveBOX is protected with 6mm laminated glass that protects the LCD from vandalism even if broken. In the extreme event of breakage, the glass can be easily replaced on site.

LOW-PROFILE WALL MOUNT

LiveBOX™ projects only 6 inches from the mounting surface using the included wall-mount.


5 YEAR AIR FILTER LIFE

Advanced membrane air filter lasts 5 years without replacement. Filters all dust, pollen and even moisture from the air for effective cooling without air conditioning.

SUPERIOR 3 YEAR WARRANTY

Comprehensive three year warranty is standard.

MECHANICAL DIMENSIONS

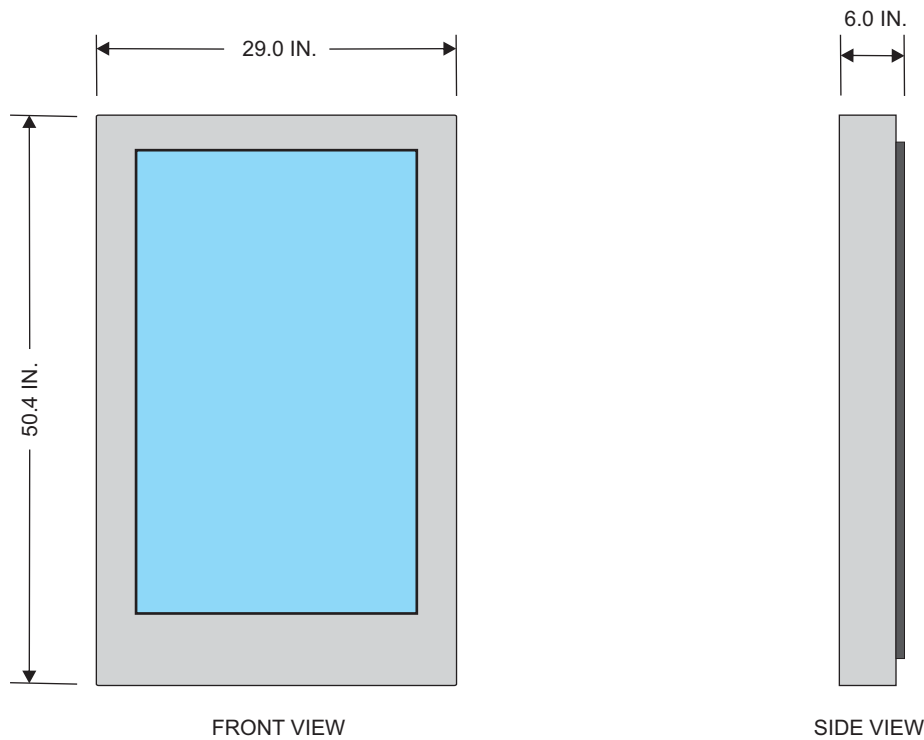

*Standard finish is clear-coated stainless steel.
Custom power-coated colors also available.*

SPECIFICATIONS

| | |
|---------------------------|--------------------------------|
| LCD Panel: | LXS-471LP |
| Input Type | Analog RGB, DVI |
| Resolution | 1920 x 1080 |
| Aspect Ratio | 9:16 |
| Display Colors | 16.7 Million |
| Display Size (inches) | 47, measured diagonally |
| Viewing Angle (min) | 89/89/89/89 degrees |
| Response Time | 10ms |
| Luminance | 2000 cd/m2 |
| Electrical: | |
| Power Input | 110-240 VAC 50/60Hz |
| Power Consumption | 400 watts |
| Electrical Approvals | CSA |
| Environmental: | |
| Operating Temperature | -40 to +40C in direct sunlight |
| Humidity Range, Operating | 5 to 95% non-condensing |

Copyright 2014, Luxtronix Technologies Inc.
All rights reserved. LuxLCD is a registered trademark of Luxtronix Inc.

LG is registered trademarks of LG Display..
Screen image is simulated. Specifications are subject to change without notice.

Luxtronix Technologies Inc.
Tel. 780-440-3737
Toll Free (in Canada) 1-888-920-1234

luxlcd.com